



EUROPEAN PPE STANDARDS FOR COMMON TREE CLIMBING EQUIPMENT

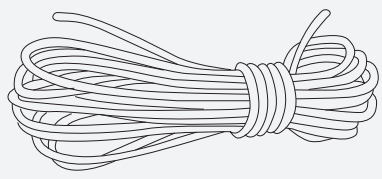

EN 1891 TYPE A & B




EN 362; EN 12275:1998




EN 12278: EN 795 TYPE B




EN 566; EN 795 TYPE B

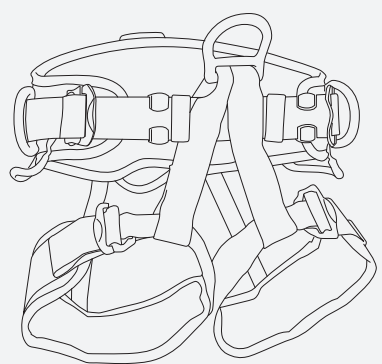


EN 358; EN 813




EN 566: EN 795 TYPE B

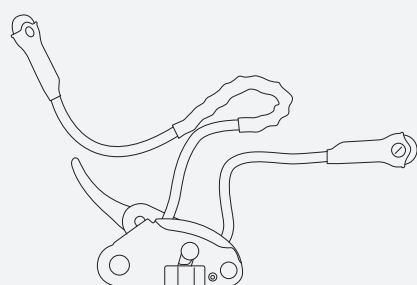

EN 358



EN 567; EN 12841 TYPE B



EN 341; EN 12841 TYPE C

Standard	Description	Rating
EN 1891 TYPE A	PPE for protection against falls from height; <b>SEMI-STATIC ROPES</b> (core and sheath)	<b>22kN</b>
EN 1891 TYPE B	PPE for protection against falls from height; <b>SEMI-STATIC ROPES</b> (core and sheath)	<b>18kN</b>
EN 362	PPE for protection against falls from height; <b>CONNECTORS</b>	<b>18-25kN</b>
EN 12275:1998	PPE for protection against falls from height; <b>MOUNTAINEERING-STYLE CONNECTORS</b>	<b>18-25kN</b>
EN 12278:2007	PPE for protection against falls from height; <b>PULLEYS</b>	<b>15kN</b>
EN 795 TYPE B	PPE for protection against falls from height; <b>ANCHOR DEVICES</b> (contains non-metallic load bearing parts - 10kN prior to 2012) #	<b>18kN</b>
EN 566:2006	PPE for protection against falls from height; <b>MOUNTAINEERING SLINGS, WEBBING</b>	<b>22kN</b>
EN 358	PPE for protection against falls from height: <b>SIDE CONNECTOR POINTS on WORK POSITIONING HARNESS</b> (side D-Rings)	<b>15kN</b>
EN 813	PPE for protection against falls from height; <b>WORK POSITIONING HARNESS</b>	<b>15kN</b>
EN 358	PPE for protection against falls from height; <b>LANYARDS</b>	<b>15kN</b>
EN 567	PPE for protection against falls from height; <b>ASCENDERS *</b>	<b>4kN</b>
EN 12841 TYPE B	PPE for protection against falls from height; <b>ROPE ADJUSTER *</b>	<b>4kN</b>
EN 341 TYPE A	PPE for protection against falls from height; <b>RESCUE DESCENDER</b>	<b>12kN</b>
EN 12841 TYPE C	PPE for protection against falls from height; <b>ROPE ADJUSTER</b>	<b>12kN</b>

\* Load at point of slippage; tensile strength not relevant, 4kN for 3 minutes, slippage 100mm  
# 12kN for metallic anchor devices