



## Double Braid Eye Splice


This splice should be used only on Donaghys Southern Ocean Yachtmaster XS, Brights and Dockline braids.

### Step 1

There are two marks to be made on the cover of the rope. Make the first mark approximately 25 diameters from the end of the rope.

The loop is then formed to required size and the second mark made opposite mark 1. This is the crossover point.

A knot is tied about 1 ½ metres back up the rope to stop the core slipping.

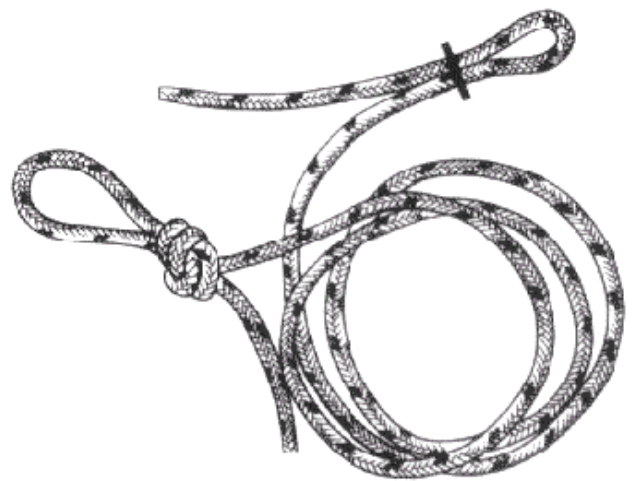


### Step 2

The core is extracted at the crossover point by bending the rope and hooking the core out with a spike. The core should be marked at this point and then pulled out another five rope diameters and marked again.

The cover is also tapered starting about 50 mm or one colour coding towards the end.

Alternate strands are then cut and the end of the cover taped.

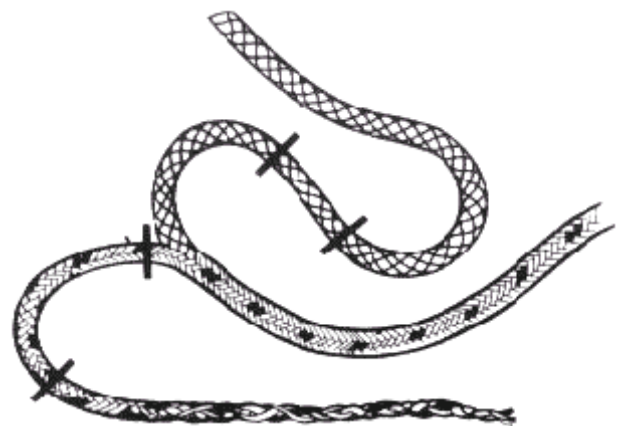




### Step 3


The taped end of the cover is taped to a fid, and pushed into the core, entering at mark 2 and pushed until the first cover mark reaches the entry point.

The fid is taken out of the core.

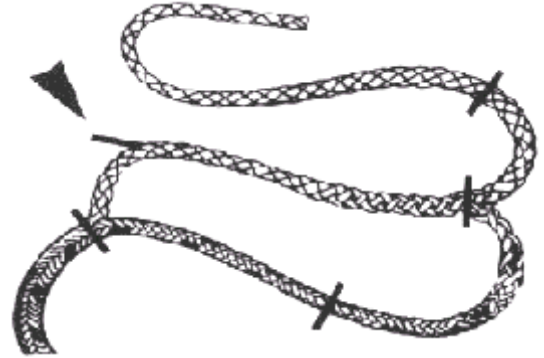

### Step 4

The end of the core is now taped to a fid and entered into the hollow part of the cover at mark 1 and pulled out at the crossover point or second mark on the cover.

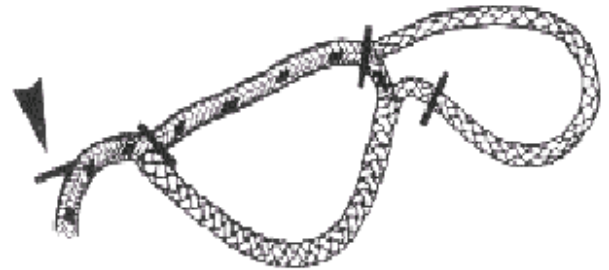

### Step 5

When the core and cover parts that form the loop have been "milked" level, the excess core left protruding at the crossover is then cut off flush with the cover. The cover is then "milked" from the 1 ½ metre knot back towards the loop.

The core should now disappear into the cover.



### Step 6

The finished splice!

