




# RP075 Tandem Trolley 50mm (2") Wheel Diameter

## Data Sheet



The main attachment point is large enough to accommodate a wide variety of Karabiners & Snaphooks. There are extra attachment holes for a secondary lanyard and a small central hole which can be used to fit an accessory (handle bar etc).

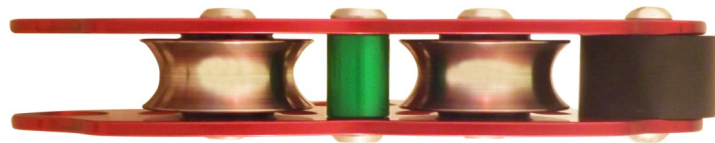

We offer versions for 13mm (1/2"), 16mm (5/8") or 20mm (3/4") Wire and the centre redundancy axle is fitted with a colour coded collar, for easy identification.

### Colour Key

- > 13mm (1/2") Wire
- > 16mm (5/8") Wire
- > 20mm (3/4") Wire


climb. work. rescue.

# ISC

SOLUTIONS IN METAL

The Zipspeed Tandem Trolleys are fitted with rubber sealed, deep groove bearings for optimal performance with a lifespan of several thousand miles/km. The Zipspeed Tandems have 7075 Aerospace grade Aluminium side plates, to minimise flexing of the plates.

The ISC Zipspeed Trolleys are also available with 75mm (3") Diameter wheels, to suit lines of varying tension, gradient and speeds (see RP076).

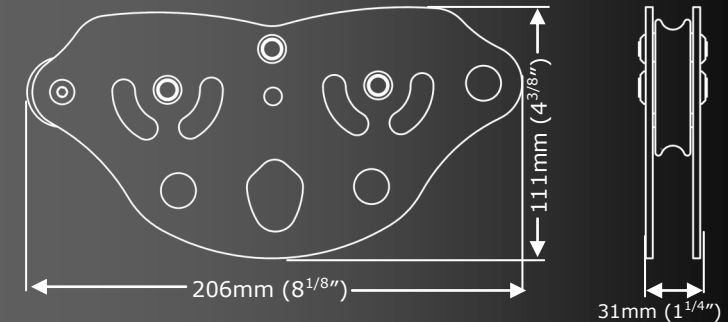

<b>Weight</b>	875g (31oz)
<b>Body Material</b>	Aluminium
<b>Finish</b>	Anodised
<b>Wheel Material</b>	Stainless Steel
<b>MBS</b>	40kN (8992lbf)