

PerfectO



Compact connections.

The PerfectO range uses a new extra short gate to make the profile as compact as possible, minimising eye-to-eye length whilst maintaining usability and easy one-handed use.


The true oval shape provides effective centring of loads and the fully rounded rope bearing areas increase carabiner and rope longevity.

Its keylock nose allows snag-free operation. The straight gate version is ideally suited for racking gear and the colour options help to quickly differentiate between equipment.

This is the smallest Locksafe gated carabiner that DMM makes and is 15mm shorter than an Ultra O yet still retains a strong construction. Available in standard and removable captive bar versions, with or without iD.



PERFECTO VOI

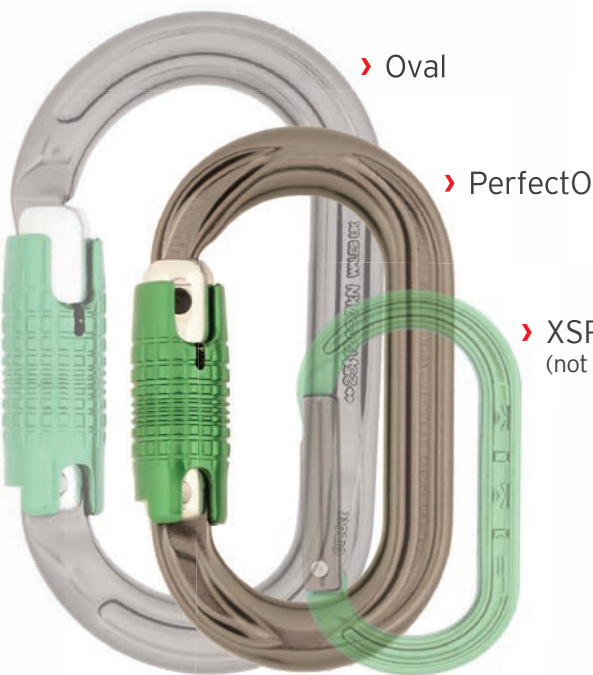

> Oval

> PerfectO

> XSRE
(not PPE)

FEATURES

- Symmetric compact oval profile - minimum possible size abides by EN standards
- I Beam technology only in non-rope bearing areas
- Rope bearing areas are full round to increase carabiner and rope longevity
- Captive bar option
- Screwgate, Kwiklock and Locksafe options
- Keylock nose for snag-free operation
- Available as DMM iD

PRODUCT INFORMATION



> Screwgate



> Kwiklock



> Locksafe



> Locksafe CB



> Straight Gate

TECH SPECS

	SCREWGATE	KWIKLOCK	LOCKSAFE	PLAIN GATE
Product Code	A592	A593	A597	A591 / A591-P4
Captive Bar	A592CB	A593CB	A597CB	-
Dimensions	95 x 56mm	95 x 56mm	95 x 56mm	95 x 56mm
Weight/CB Weight	60 / 62g	66 / 68g	66 / 68g	50g
Gate Opening	16mm	15mm	15mm	19mm
Strength (Major Axis / Gate Open)	7kN	7kN	7kN	7kN
Strength (Major Axis / Gate Closed)	24kN	24kN	24kN	24kN
Strength (Minor Axis)	7kN	7kN	7kN	7kN
Conformance	EN12275:2013 EN362:2004	EN12275:2013 EN362:2004	EN12275:2013 EN362:2004	EN12275:2013

