




RP240 > TWIN HOLE ULTRASAFE HAND ASCENDER. AVAILABLE IN LEFT AND RIGHT-HAND VERSIONS.

ISC MANUFACTURES AN EXTENSIVE RANGE OF ASCENDERS AND DESCENDERS FOR USE ON A WIDE VARIETY OF ROPES. ALL ASCENDERS AND DESCENDERS CONFORM TO RELEVANT EUROPEAN AND ANSI STANDARDS.

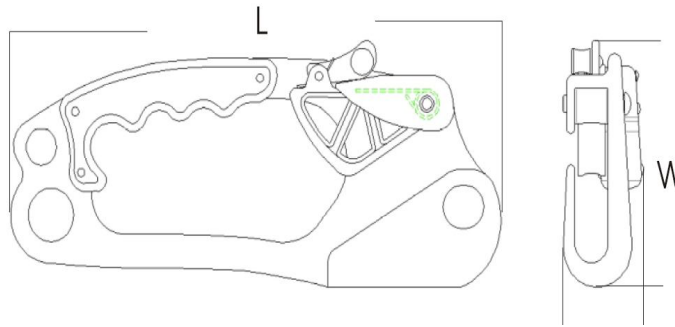

DIMENSIONS >

LENGTH > 217mm

WIDTH > 87mm

THICKNESS > 30mm

MATERIAL > HIGH STRENGTH ALUMINIUM. STAINLESS STEEL CAM

MINIMUM BREAKING LOAD > TESTED ON 12.7 MM SUPERLINE . PRIMARY FAILURE OF ROPE SHEATH AT 2500 LBS (11KN). ASCENDER STILL OPERABLE.

APPROVED STANDARDS > EN567. NFPA COMPLAINT

FINISH > HARD ANODISED

QUALITY > 100% INSPECTED

WEIGHT > 364g



1

2

3