

FELCO C16

Cable cutter - Steel cable cutter

Made in Switzerland by FELCO



16mm/0.63in. 590mm/23.2in. 2300g/81.1oz.



- **Reliable:** unbreakable hardened handles made of forged aluminium with a lifetime guarantee / blades and fastenings in high-quality hardened steel / parts subject to wear and tear can be replaced
- **Efficient:** clean, precise cut without crushing the cable thanks to the triangular cutting system / easy and durable cutting adjustment
- **Ergonomic:** lightweight handles / helpful lever effect / comfortable plastic coating

Our recommendation (1★: Recommended, 2★: Strongly recommended, 3★: Best fit)

Cables, wire-drawing mills	★★★
Springs industry	★★★
Electricity, telecommunications	★★★
Oil industry	★★★
Automotive, pneumatics industry	★★★
Rail transport	★★★
Gondola lifts, cable cars, ski-lifts, life-lines	★★★
Aeronautics	★★★
Watersports	★★★
Harbour activities	★★★
Fishing	★★★
Forestry	★★★
Agriculture, viticulture	★★★
Administration, police, customs	★★★
Civil engineering, buildings	★★★
Small hand	★★★
Large hand	★★★
Left-handed	★★★

Cutting capacities


Material	Maximum cutting diameter
Galvanised steel cables, textile core	16mm (0.63in)
Galvanised steel cables, steel core	14mm (0.55in)
Hard steel cables, resistance 160 kg/mm ²	14mm (0.55in)
Non-oxidable steel cables, resistance 190 kg/mm ²	7mm (0.28in)
Extra tough cables and strands, resistance 210 kg/mm ²	6mm (0.24in)
Electric cables (copper or aluminium) with steel core)	16mm (0.63in)
Aluminium- of koperstangen	14mm (0.55in)
Iron rods, resistance 60 kg/mm ²	10mm (0.39in)
Tempered spring wire	5mm (0.2in)
Welded wire mesh	<input checked="" type="checkbox"/>
Rubber conveyor belt	<input checked="" type="checkbox"/>
Prestressed concrete girder	<input checked="" type="checkbox"/>

The points of excellence



Forged aluminium handles guaranteed for life*

Lightweight, strong and sturdy thanks to special aluminium alloys and advanced precision forging methods perfectly mastered by FELCO.

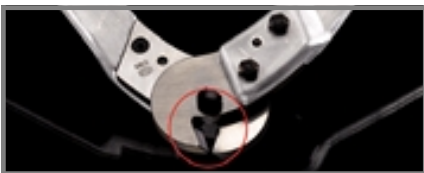

Triangular cutting action of wire and cable cutters

The triangular cutting action delivers a progressive cut for wires and cables. The blades squeeze and restrict the cable instead squashing it. Thanks to this feature, it is generally not necessary to tie the cable before the cut to avoid unravelling.

Accessories



FELCO 980

Maintenance product

Spray












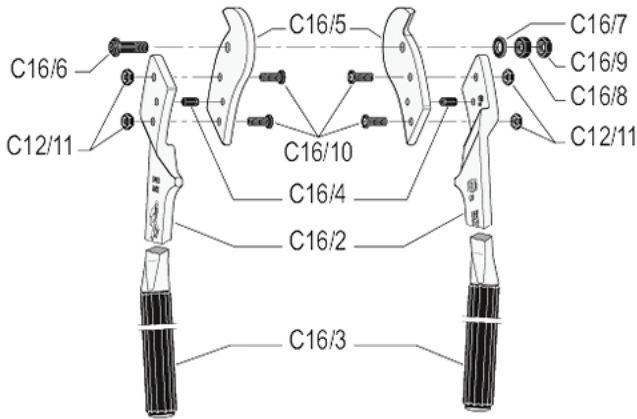


FELCO 990

Maintenance product

Grease

Spare parts



	REF.	Designation	Composition	UCC bar code
	C16/5	Blade	1x C16/5	
	C16/90	Kit	1x C16/6 + 1x C16/7 + 1x C16/8 + 1x C16/9	
	C16/2	Handle with coating and pin	1x C16/2 + 1x C16/3 + 1x C16/4	
	C16/3	Coating	1x C16/3	
	C16/4	Pin	1x C16/4	
	C16/6	Bolt	1x C16/6	
	C16/10	Hexagon screw	1x C16/10	
	C16/8	Nut	1x C16/8	
	C12/11	Counter nut	1x C12/11	
	C16/9	Counter nut	1x C16/9	
	C16/7	Washer	1x C16/7	

Maintenance



Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.

Replacement parts



Changing the blades

If the tool is no longer cutting properly and has already been resharpened on a number of occasions, or when its cutting edge is no longer holding firm when cutting, change the blades!