

## FELCO C9

Cable cutter - Steel cable cutter

Made in Switzerland by FELCO



9mm/0.35in. 325mm/12.8in. 750g/26.5oz.



- **Reliable:** unbreakable hardened handles made of forged aluminium with a lifetime guarantee / blades and fastenings in high-quality hardened steel / parts subject to wear and tear can be replaced
- **Efficient:** clean, precise cut without crushing the cable thanks to the triangular cutting system / easy and durable cutting adjustment
- **Ergonomic:** lightweight handles / helpful lever effect / comfortable plastic coating

Our recommendation (1 ★: Recommended, 2 ★: Strongly recommended, 3 ★: Best fit)

Cables, wire-drawing mills	★★★
Springs industry	★★★
Electricity, telecommunications	★★★
Oil industry	★★★
Automotive, pneumatics industry	★★★
Rail transport	★★★
Gondola lifts, cable cars, ski-lifts, life-lines	★★★
Watersports	★★★
Harbour activities	★★★
Forestry	★★★
Agriculture, viticulture	★★★
DIY, leisure, floral arrangements	★★★
Civil engineering, buildings	★★★
Repair and manufacturing workshops	★★★
Small hand	★★★
Large hand	★★★
Left-handed	★★★

## Cutting capacities


Material	Maximum cutting diameter
Galvanised steel cables, textile core	9mm (0.35in)
Galvanised steel cables, steel core	8mm (0.31in)
Hard steel cables, resistance 160 kg/mm <sup>2</sup>	7mm (0.28in)
Non-oxidable steel cables, resistance 190 kg/mm <sup>2</sup>	6mm (0.24in)
Extra tough cables and strands, resistance 210 kg/mm <sup>2</sup>	5mm (0.2in)
Electric cables (copper or aluminium) with steel core)	9mm (0.35in)
Aluminium- of koperstangen	9mm (0.35in)
Iron rods, resistance 60 kg/mm <sup>2</sup>	7mm (0.28in)
Tempered spring wire	3mm (0.12in)
Welded wire mesh	<input checked="" type="checkbox"/>
Rubber conveyor belt	<input checked="" type="checkbox"/>

## The points of excellence



### Forged aluminium handles guaranteed for life\*

Lightweight, strong and sturdy thanks to special aluminium alloys and advanced precision forging methods perfectly mastered by FELCO.

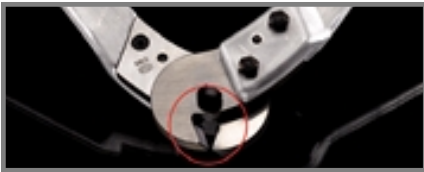

### Triangular cutting action of wire and cable cutters

The triangular cutting action delivers a progressive cut for wires and cables. The blades squeeze and restrict the cable instead squashing it. Thanks to this feature, it is generally not necessary to tie the cable before the cut to avoid unravelling.

Accessories



FELCO 980

Maintenance product

Spray












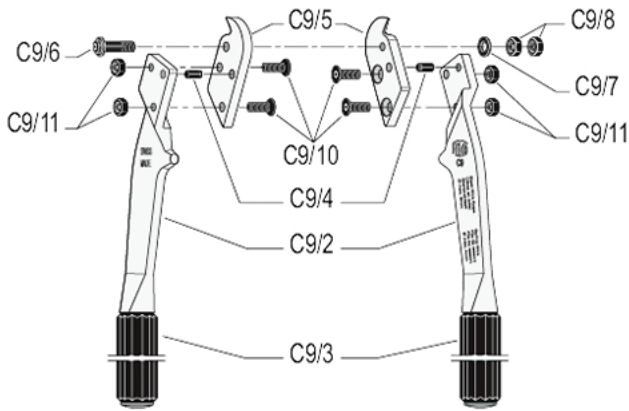

FELCO 990

Maintenance product

Grease

## Spare parts



	REF.	Designation	Composition	UCC bar code
	C9/5	Blade	1x C9/5	
	C9/90	Kit	1x C9/6 + 1x C9/7 + 2x C9/8	
	C9/2	Handle with coating and pin	1x C9/2 + 1x C9/3 + 1x C9/4	
	C9/3	Coating	1x C9/3	
	C9/4	Pin	1x C9/4	
	C9/6	Bolt	1x C9/6	
	C9/10	Hexagon screw	1x C9/10	
	C9/8	Nut	1x C9/8	
	C9/11	Counter nut	1x C9/11	
	C9/7	Washer	1x C9/7	

## Maintenance



### Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.

---

## Replacement parts



### Changing the blades

If the tool is no longer cutting properly and has already been resharpened on a number of occasions, or when its cutting edge is no longer holding firm when cutting, change the blades!